# work pod large

PRODUCT SPECIFICATION SHEET

This document contains technical information about the WORK POD LARGE



# MODULAR DESIGN MADE WITH SUSTAINABLE MATERIALS, MANUFACTURED LOCALLY FOR A CIRCULAR ECONOMY

In today's interconnected world, where the boundaries between our personal and professional lives are seamlessly merging and constant internet connectivity drives perpetual communication, maintaining privacy and tranquillity has become a crucial aspect of our daily routine an imperative design consideration in today's open and collaborative working and learning environments. The demand for a peaceful enclave is undeniable.

The WORK POD LARGE provides a noise-reducing sanctuary that not only caters to our internal need for retreat but also provides a small private space for phone & video calls or individual work and learning tasks in an open and collaborative working and learning environment.

The WORK POD LARGE offers various integration options for its side panels, including an integrated Side table that can be elevated, combined with a stool or a (task)chair.

This WORK POD LARGE effortlessly fits into any existing or new space and comes fully equipped with a motion sensor-driven fresh air ventilation system, an automated LED lighting system, a primary power connection (230V), and multiple integrated multifunctional power sockets. (Includes 1 wooden crate, 1 ventilator, accommodates 1 person, option for a high seat available).

**Design by Ecolution** 

#### **CONTENT**

Technical date page 3 **Dimensions** page 4 Ventilation page 5 Electricity & cable management page 5 Interior & exterior furniture options page 6 Fabrics & finishes page 7-8 Acoustic performance date page 9 Modular range page 10

#### **CERTIFICATIONS**

















## **TECHNICAL DATE**

#### **WORK POD LARGE**

Users

1 person

4

Weight

462 kg | 1018 lbs

Installation

4 hours, including unboxing at spot Two installers required Cordless screwdriver and leveler required K A

**Outside dimensions** 

Depth: 1125 mm Height: 2333 mm With: 2065 mm

Power:

Mains supply: 230V AC 50-60Hz, max 16A
Cable connection: GST18
Stand-by consumption: 2,1 W
Consumption LED lights 2x) in total: 10 W
Consumption ventlator (2x) in total: 11,52 W
Infrared motion sensor time delay: 10 sec -7 min.

Lighting unit:

Power usage in total: 2x 5 W = 10 W Input: 230V AC 50-60 Hz Lumen output in total: 900 lumen Color Temperature: 2700 K Lifespan: +/- 15.000 hours

Fitting: GU10

Power usage: 5,76W (1x)
Input: 12V DC
Airflow rate when occupied: 53 m3/h
Ventilators switched of automatically after
7 minutes without occupancy
DB per ventilator during occupancy: 5 dB(A)

Packaging

Knockdown wooden crate
Dimensions 2390mm / 800mm / 1750mm
Material planed Pine wood & MDF board
Required amount of boxes = 1
Credit for each box when returned
Optional sofa's and table tops packed separately

"" Interior & exterior options

Exterior: shelf (possible in high and low position), LCD-screen panel, magnetic whiteboard Interior: side table, shelf, LCD-screen panel, magnetic whiteboard, sofa's

**Fabrics and finishes** 

Interior: upholstered eco-fabric-, eco-felt- or laminated acoustic wood panels Exterior: upholstered eco-fabric-, eco-felt- or laminated panels


Materials


Panels made of 100% recycled wood and panels made of recycled paper and organic waste Frame made of powder coated RAL9005 aluminum extrusion profiles and sheet metal Acoustic filling made of 100% recycled jeans Safety glass panels 5 mm + 5 mm / 0.2 in + 0.2 in Insulation material made of 100% recycled textile Upholstery made of 50% - 100% recycled textile EPDM rubber u-profile for windows and door EPDM rubber soundblock profile for door frame




## **DIMENSIONS**

#### **WORK POD LARGE**

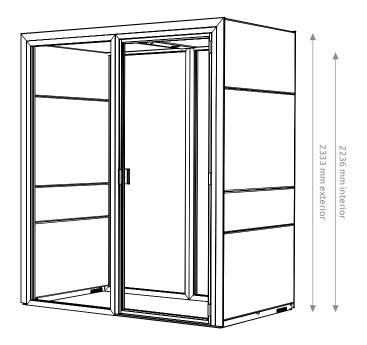






# **INTERIOR OPTIONS**




WORK POD LARGE with integrated side table.
Side table 500mm x 1012mm






WORK POD LARGE with integrated shelf.
Shelf 250mm x 1012mm





WORK POD LARGE with desk. Desk 800mm x 1000mm





#### **VENTILATION**







Input fresh air: Perforated floor plinths with internal acoustic labyrinth. Output air: 2x ventilators integrated in roof.

Airflow rate when occupied: 53 m<sup>3</sup>/h

#### **LIGHTING**



LED-Light



sensor

Directional LED-lights integrated in ceiling: 2x 5 W = 10 WLumen output in total: 900 lumenColor Temperature: 2700 K

Activation: By infrared motion detection integrated in ceiling

Lifespan LED bulbs: +/- 15.000 hours

Fitting: GU10

#### **POWER CONNECTION**

The pods can be connected to the network of building from each side of the pod 5cm above the floor or from the roof if preferable. Pods with a mid-panel integrated at the back have an extra option using a 60mm diameter grommet placed 3cm above the floor in the middle. Because the panels at the outside and inside of the pod can be removed, a cable channel inside the wall is accessible and cables can be guided in any direction.

All pods will be delivered with a GST18 power block with four gangs and two five meter GST18 cables to connect the pod with power sockets to the building.



power cables with GST18 plug



cable splitter for connecting



GST18 power block integrated in ceiling tray

#### INTEGRATED POWERSOCKET OPTIONS



#### POWER SOCKET STANDARD

- 230 volt RA
- including 200mm cable GST18
- 68mm diameter



#### UTP Cat6 2x

- Two UTP ports included
- No cables included for ports at the backside
- 68mm diameter



#### **USB SPEED CHARGING**

- 2x USB port include
- including 200mm cable GST18
- 68mm diameter



#### Cat6 UTP + 1x HDMI

- 1x UTP Cat6 port included
- 1x HDMI port included
- 68mm diameter



## **OPTIONAL**

#### **SOFA**



Sofa with removable covers 980mm x 665mm x 824mm Seating height 460mm

Available in different eco-fabrics.

# MAGNETIC WHITE BOARD



Magnetic whiteboard available for inside or integrated at the outside of the pods. Dimensions 1120mm x 780mm

#### **SIDE TABLE**



Side table in the wall at the left- or right side of the pod. In high position (1050mm) from floor or low position (750 mm). Available in different colours. Dimensions 500mm x 1010mm

#### **SHELF**



Shelf integrated in the wall at the left- or right side of the pod. In high position (1050mm) from floor or low position (750 mm). Available in different colours.

Dimensions 250mm x 1010mm

#### **LCD-SCREEN PANEL**



LCD-screen panel, available for inside or integrated at the outside of the pods. Dimensions 1120mm x 780mm



### **FABRICS**

#### **ECO-FABRIC SOTO**











60% WASTE

Price category 1, in various colors

Composition: 100% recycled PET (plastic bottles waste)

Weight: 600 g/m2 | 17.64 oz/yd2

Abrasion resistance: 100.000 Martindale

Flammability: EN 1021 1-2

#### **ECO-FABRIC WOOLY**











70% WΔSTE

Price category 2, in various colors

Composition: 70% Wool recycled / 25% PA recycled /

5% OF

Weight: 600 g/m2 | 17.64 oz/yd2

Abrasion resistance: 100.000 Martindale

Flammability: EN 1021 1-2

#### **ECO-FABRIC BLAZER**





Price category 4, in various colors Composition: 100% Virgin Wool Weight: 460 g/m2 | 13.55 oz/yd2 Abrasion resistance: 50.000 Martindale

Flammability: EN 1021 1-2

#### **ECO-FABRIC REBO**











MATERIAL

Price category 1, in various colors Composition: 96% recycled PET, 4% NY Weight: 590 g/m2 | 17.36 oz/yd2

Abrasion resistance: 90.000 Martindale

Flammability: BS 5852

#### **ECO-FABRIC ORGANI**











89% LESS CO2

Price category 2, in various colors

Composition: 50% Wool recycled / 20% PA recycled /

30% LI

Weight: 550 g/m2 | 16.23 oz/yd2

Abrasion resistance: 100.000 Martindale Flammability: BS 5852-part 1 / EN 1021 1-2

#### **ECO-FABRIC MAIN LINE FLAX**





Price category 3, in various colors Composition: 70% Virgin Wool, 30% flax Weight: 437 g/m2 | 12.88 oz/yd2 Abrasion resistance: 50.000 Martindale

Flammability: EN 1021 1-2

#### **ECO-FELT**











Price category 2, in various colors Composition: 100% recycled textile from different origin. Weight: 450 g/m2 | 13.29 oz/yd2 Abrasion resistance: the felt is not suitable for upholstery of seats Flammability: EN 1101 1-2 standard.

## **FINISHES**

#### **LAMINATED PANELS OUTSIDE**



light oak



natural oak



fumed oak



black oak



black mat



brushed gold



brushed aluminum



brushed bronze



brushed metal blue



moss grey



slate grey



wool beige



brown weave

#### LAMINATED WOODGRAIN ECO PANELS INSIDE



light oak



natural oak



fumed oak



black oak

#### **TABLE & SHELF FINISHES RECYCLED**



light oak



natural oak



fumed oak



black oak



black mat




white



## **ACOUSTICS**



- automatic drop-seal integrated in top and bottom of the door
- gaps around the door closed with rubber profiles in door frame
- sound absorbing labyrinth inside the floor plinths and between ceiling and roof panels
- double layered 10,7mm thick glass panels with acoustic layer in between
- 110mm thick sound absorbing panels at both sides and at ceiling
- 50-shore rubber soft band underneath the floorplinths for different floor surfaces

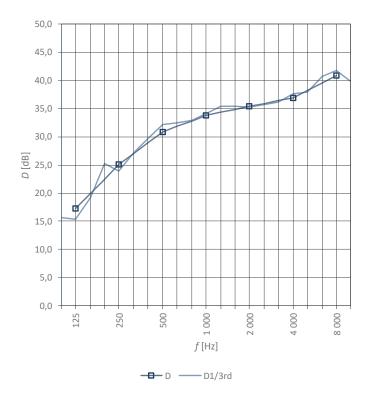





#### **ACOUSTICS**

Speech level insertion loss Ds,A is 30 dB (measured according to ISO 23351-1), Class category A for the Work Pod (which is of identical build with different geometries). Test report available upon request.



# **COLLECTION PODS**



**PHONE POD** 



**FLEX POD** 



**DUO POD** 



**WORK POD** 



WORK POD LARGE



WORK POD XL



**MEETING POD** 



**MEETING POD LARGE** 



**MEETING POD XL**